


Tip:5x5

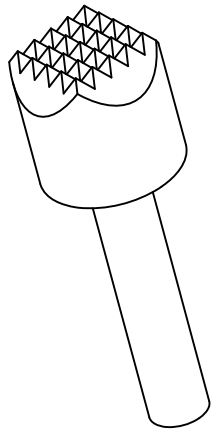

Note:

1: Material (材料) :

Barrel: Brass (针管: 黄铜)

Plunger: BeCu (针头: 铍铜)

2: Plating (电镀) :

Barrel: (针管: 镀金)

Plunger: (针头: 镀金)

3: Electrical (电气特性) :

Rated Current: 1.0A (额定电流: 1.0A)

Contact Resistance: 50 mohm Max. at working stroke.

接触电阻: 最大50毫欧 (在工作行程状态下)

4: Mechanical (机械性能) :

Force: 210g $\pm$ 20% at 4.30mm stroke (210g $\pm$ 20% 在4.30mm行程状态)。

Full stroke: 6.50mm (全行程: 6.50mm)

Durability: 200.000 cycles(min) (寿命: 200000次)

SCALE:	N/A	UNIT	mm	THE UNMARKED TOLERANCE ARE AS BELOW :				DESIGNED BY:	DWG. NO.	SP1-136340-H02
SHEET:	1 of 1	PROJECTION		LENGTH		ANGLE		CHECKED BY:	TITLE:	测试探针
DATE:	2013.07.26	VER.	D.0	X.XX	$\pm 0.05$ mm	X.XX	$\pm 0.50^\circ$	APPROVED BY:		
				X.X	$\pm 0.10$ mm	X.X	$\pm 1.00^\circ$			
				X.	$\pm 0.20$ mm	X.	$\pm 2.00^\circ$			