
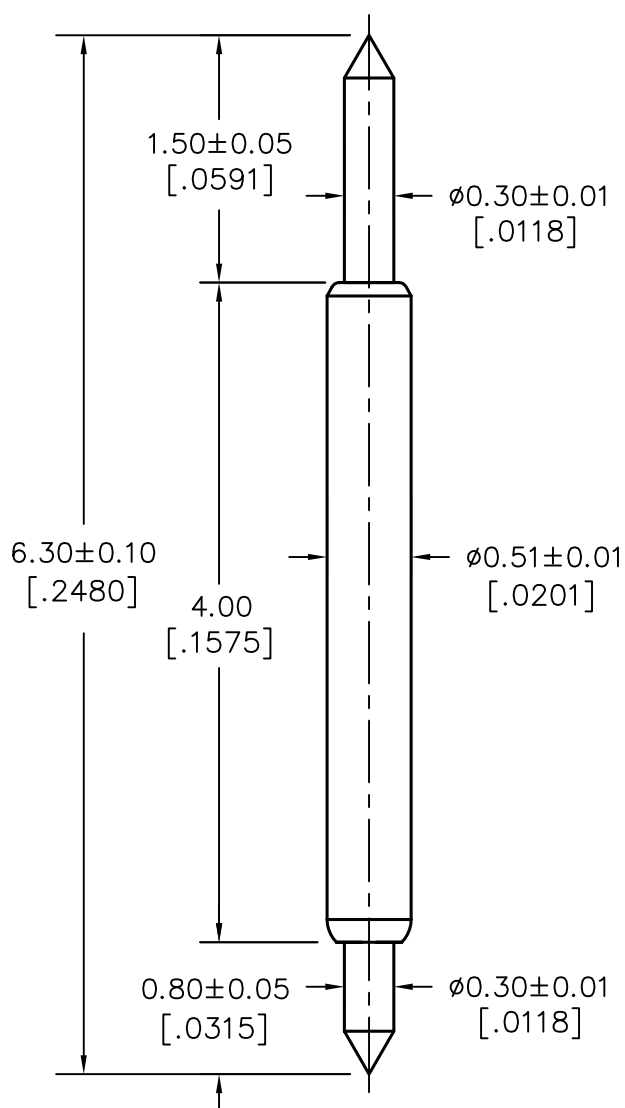




Top



Bottom

Tip Style

F	B	D	G	A
				

Unit: Millimeter[inch]

Pointing accuracy: $\pm 0.04\text{mm}$

- **Minimum Pitch:** 0.65mm [.0256]

- **Mechanical Specifications:**

Force: 28g[.9877oz] at 0.65mm[.0256].
Recommended stroke: 0.65mm[.0256].
Full stroke: 1.40mm[.0551].
Mechanical Life: 500,000 cycles.

- **Electrical Specifications:**

Rated Current: 1.0A Continuous.
Self Inductance: 1.52nH.
Bandwidth: 14.7GHz@-1dB.

- **Operating Temperature:** -55°C to +155°C

- **Material and Finishes:**

Barrel: Phosphor Bronze /Gold plated
Plunger Top: Hardened BeCu /Gold plated
Plunger Bottom: Hardened BeCu /Gold plated
Spring: Stainless Steel /Gold plated

Contact Resistance: Less than 180mohm.
Capacitance: 0.81pF.
Time Delay: 31.5 pSec.