DP1-070097-GF01

2014.10.09

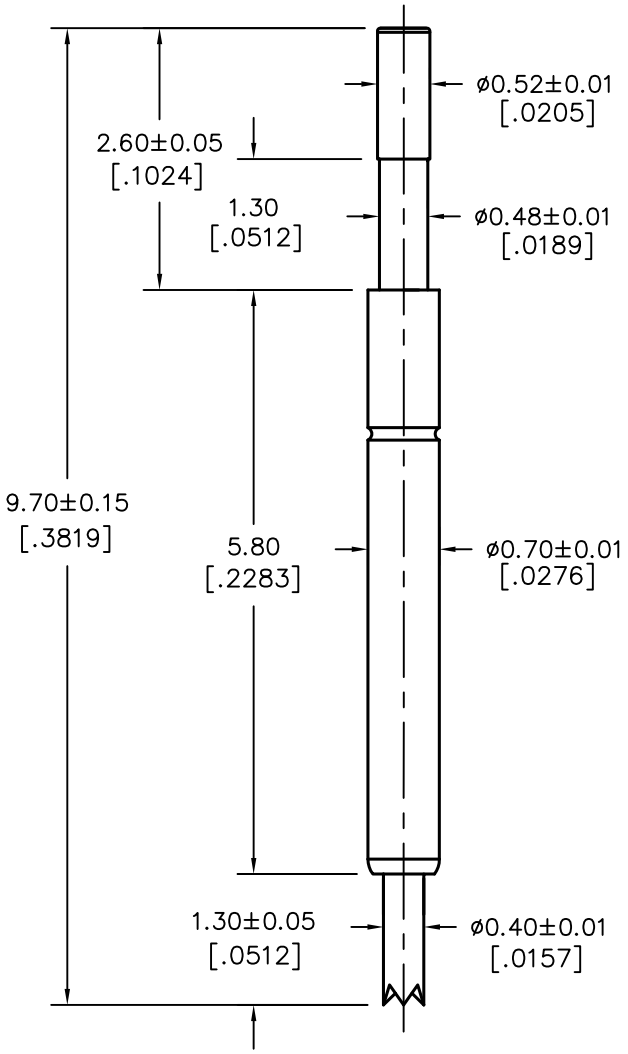



Top



Bottom

Tip Style

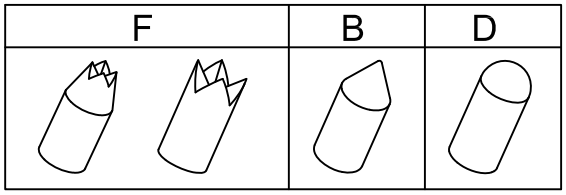

Unit: Millimeter[inch]

Pointing accuracy: ±0.04mm

- ***Minimum Pitch:*** 0.90mm [.0354]

- ***Mechanical Specifications:***
  Force: 23g[.8113oz] at 1.00mm[.0394].
  Recommended stroke: 1.00mm[.0394].
  Full stroke: 1.80mm[.0709].
  Mechanical Life: 500,000 cycles.

- ***Electrical Specifications:***
  Rated Current: 1.0A Continuous.
  Self Inductance: 1.52nH.
  Bandwidth: 7.45GHz@-1dB.

- ***Operating Temperature:*** -55°C to +155°C

- ***Material and Finishes:***
  Barrel: Phosphor Bronze /Gold plated
  Plunger Top: Hardened BeCu /Gold plated
  Plunger Bottom: Hardened BeCu /Gold plated
  Spring: Music Wire /Gold plated

Contact Resistance: Less than 100mohm.
Capacitance: 0.81pF.
Time Delay: 48 pSec.

All right reserved. No part of this drawing may be copied, reproduced and transmitted in any forms or by any means without written permission of Xinfucheng Shenzhen Electronics Co., Ltd.

http://www.xfcdz.com.cn TEI: 0755-81739711 FAX: 0755-27533241